
## Bulkhead Nut: BN (Fractional)

| Part Number* | Dimensions—inches L | J |
|---|---|---|
| 1BN[ ] | 1/8 | 3/8 |
| 2BN[ ] | 7/32 | 1/2 |
| 3BN[ ] | 7/32 | 9/16 |
| 4BN[ ] | 1/4 | 5/8 |
| 6BN[ ] | 17/64 | 3/4 |
| 8BN[ ] | 5/16 | 15/16 |
| 10BN[ ] | 23/64 | 1 1/16 |
| 12BN[ ] | 13/32 | 1 3/16 |
| 14BN[ ] | 13/32 | 1 5/16 |
| 16BN[ ] | 13/32 | 1 9/16 |
| 24BN[ ] | 1/2 | 2 1/4 |
| 32BN[ ] | 1/2 | 2 3/4 |

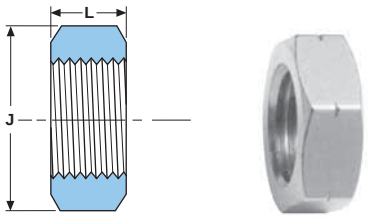



## Bulkhead Nut: BN/MM (Metric)

| Part Number* | Fitting Size mm | Dimensions—mm L | J |
|---|---|---|---|
| 2BN[ ] | 3 | 5.5 | 12.7 |
| 3BN[ ] | 4 | 5.5 | 14.3 |
| 4BN[ ] | 6 | 6.4 | 15.9 |
| 8BN[ ]MM | 8 | 6.4 | 17.5 |
| 10BN[ ]MM | 10 | 6.7 | 19.1 |
| 8BN[ ] | 12 | 7.9 | 23.8 |
| 14BN[ ]MM | 14 or 15 | 7.9 | 23.8 |
| 10BN[ ] | 16 | 9.1 | 27.0 |
| 12BN[ ] | 18 | 10.3 | 30.2 |
| 14BN[ ] | 20 or 22 | 10.3 | 33.3 |
| 16BN[ ] | 25 | 10.3 | 39.7 |

## Knurled Nut: KN (Fractional)

| Part Number* | T Tube O.D. | Dimensions—inches B | L |
|---|---|---|---|
| 1KN[ ] | 1/16 | 5/16 | 0.36 |
| 2KN[ ] | 1/8 | 7/16 | 0.52 |
| 3KN[ ] | 3/16 | 1/2 | 0.52 |
| 4KN[ ] | 1/4 | 9/16 | 0.53 |
| 6KN[ ] | 3/8 | 11/16 | 0.59 |
| 8KN[ ] | 1/2 | 7/8 | 0.70 |
| 10KN[ ] | 5/8 | 1 | 0.70 |
| 12KN[ ] | 3/4 | 1 1/8 | 0.72 |
| 14KN[ ] | 7/8 | 1 1/4 | 0.78 |
| 16KN[ ] | 1 | 1 1/2 | 0.78 |




HOKE Gyrolok Fittings are available with knurled nuts and nylon ferrules for use with polyethylene tubing. Hand-tightening allows for quick, easy assembly and disassembly, while providing a leak-tight seal, ideally suited for laboratory hookups. Use such fittings with glass and other hard wall tubing materials.

To order, simply add KNN to the basic part number.
**Example:** 4CM4 with a knurled nut and nylon ferrules would be 4CM4 KNN.

## Screen: SCRN

| Part Number* | Gyrolok® End Size | Thickness |
|---|---|---|
| 4SCRN 316 | 1/4 | 0.05 |
| 6SCRN 316 | 3/8 | 0.05 |





Use to prevent insects from entering open vent lines.
**Usage Instructions:**
1. Substitute screen for rear ferrule in an open HOKE Gyrolok-ended line. (No tubing connected.)
2. Finger-tighten nut.

## Safety Changer Nut & Ferrule Sets: SCNF



Each SCNF contains 5 nut and ferrule sets. A nut and ferrule set consists of 1 nut, 1 front ferrule and 1 rear ferrule.

## Safety Changer Ferrule Sets: SCF



Each SCF contains 10 ferrule sets as noted. A ferrule set consists of 1 front ferrule and 1 rear ferrule.

Provides a safe, easy, correct way to reuse existing fittings and valves with new HOKE Gyrolok components. Color coding differentiates metric and fractional parts and materials.

### Fractional

| Part Number* | Nut & Ferrule Sets/Changer | Tube O.D.— inches |
|---|---|---|
| 1SCNF[ ] | 5 | 1/16 |
| 2SCNF[ ] | 5 | 1/8 |
| 3SCNF[ ] | 5 | 3/16 |
| 4SCNF[ ] | 5 | 1/4 |
| 6SCNF[ ] | 5 | 3/8 |
| 8SCNF[ ] | 5 | 1/2 |
| 10SCNF[ ] | 5 | 5/8 |
| 12SCNF[ ] | 5 | 3/4 |
| 16SCNF[ ] | 5 | 1 |

### Metric

| Part Number* | Nut & Ferrule Sets/Changer | Tube O.D.— mm |
|---|---|---|
| 3SCNF[ ]MM | 5 | 3 |
| 6SCNF[ ]MM | 5 | 6 |
| 8SCNF[ ]MM | 5 | 8 |
| 10SCNF[ ]MM | 5 | 10 |
| 12SCNF[ ]MM | 5 | 12 |



Color Coded Package:
Green: Fractional Brass, Fractional 316 Stainless Steel
Red: Fractional Monel
Blue: Metric

**How to Order**
Add designated material to part number. For example:
Brass = BR
316 Stainless Steel = 316
Monel = M
**Example:** 2SCNF 316 (5 nut and ferrule sets for 1/8" tubing in 316 Stainless Steel.)

### Fractional

| Part Number* | Nut & Ferrule Sets/Changer | Tube O.D.— inches |
|---|---|---|
| 1SCF[ ] | 10 | 1/16 |
| 2SCF[ ] | 10 | 1/8 |
| 3SCF[ ] | 10 | 3/16 |
| 4SCF[ ] | 10 | 1/4 |
| 6SCF[ ] | 10 | 3/8 |
| 8SCF[ ] | 10 | 1/2 |
| 10SCF[ ] | 10 | 5/8 |
| 12SCF[ ] | 10 | 3/4 |
| 16SCF[ ] | 10 | 1 |

### Metric

| Part Number* | Nut & Ferrule Sets/Changer | Tube O.D.— mm |
|---|---|---|
| 3SCF[ ]MM | 10 | 3 |
| 6SCF[ ]MM | 10 | 6 |
| 8SCF[ ]MM | 10 | 8 |
| 10SCF[ ]MM | 10 | 10 |
| 12SCF[ ]MM | 10 | 12 |

* [ ] see page 6 for material specifications.



*Dimensions for reference only. Subject to change.*