
models 3/2 with vent

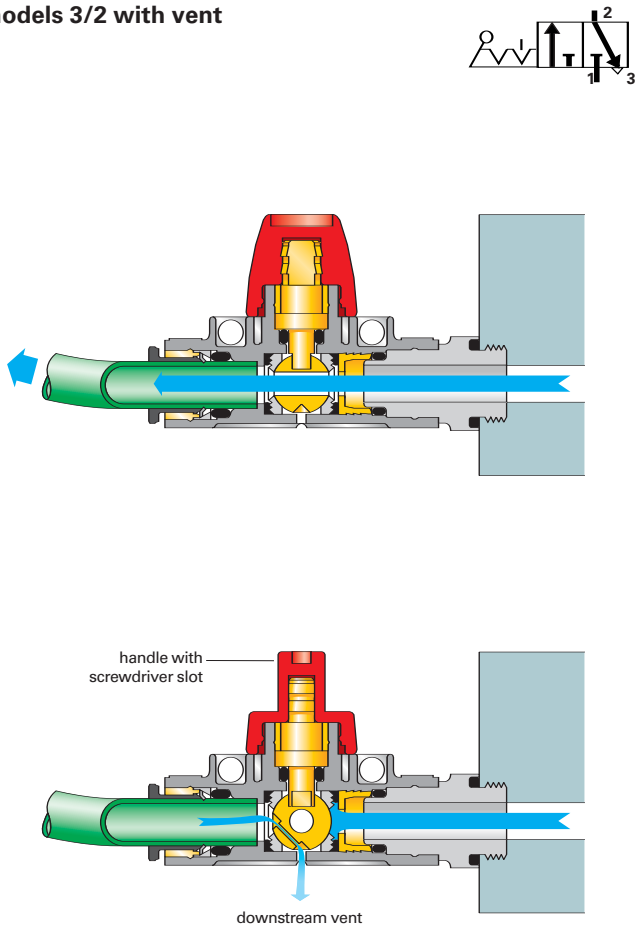

Legris mini-ball valves enable in-line opening and closing of a pneumatic circuit.

Compact and light weight, they are suited to all types of installation. Moreover, thanks to the **3 types of mountin**g available, these models are suited to all applications.

Their screwdriver slot knob allows opening and closing, even when access is difficult. Depending on the model, the handle is differentiated by colour and marked with the corresponding pneumatic symbol, in order to enable **immediate identification** by the user.

Full passage, Legris mini-ball valves offer excellent flow performance.


Technical specifications

Suitable fluid	compressed air
Maxi pressure	10 bar
Vacuum capability	vacuum of 755 mm Hg (99% of vacuum)
Working temperature	- 20° to + 80°C

7913 3/2, with vent, with push-in connection



body – polymer H.R.
nickel-plated brass ball




ØD		H	H1	J	K	L	N	kg
4	7913 04 00	37	7,5	15	22	51	16,2	0,022
6	7913 06 00	37	7,5	15	22	52	16,2	0,041
8	7913 08 00	37	7,5	15	22	52	16,2	0,056
10	7913 10 00	43	11	20	30	66	22	0,115
12	7913 12 00	43	11	20	30	66	22	0,147

7914 3/2, with vent, with male BSP parallel thread and push-in connection



body – polymer H.R.
nickel-plated brass ball




ØD	C		F	H	J	K	L	L1	N	kg
6	G1/8	7914 06 10	13	37	14	22	62	37	16,2	0,054
8	G1/4	7914 08 13	16	37	17,5	22	61	35	16,2	0,068
10	G3/8	7914 10 17	20	43	22	30	74	41	22	0,102
12	G1/2	7914 12 21	24	43	26	30	75	42	22	0,140

7910 2/2, with push-in connection



body – polymer H.R.
nickel-plated brass ball




ØD		H	H1	J	K	L	N	kg
4	7910 04 00	37	7,5	15	22	51	16,2	0,021
6	7910 06 00	37	7,5	15	22	52	16,2	0,040
8	7910 08 00	37	7,5	15	22	52	16,2	0,055
10	7910 10 00	43	11	20	30	66	16,2	0,112
12	7910 12 00	43	11	20	30	66	16,2	0,144

7911 2/2, with male BSP parallel thread and push-in connection



body – polymer H.R.
nickel-plated brass ball




ØD	C		F	H	J	K	L	L1	N	kg
6	G1/8	7911 06 10	13	37	14	22	62	37	16,2	0,052
8	G1/4	7911 08 13	16	37	17,5	22	61	35	16,2	0,066
10	G3/8	7911 10 17	20	43	22	30	74	41	16,2	0,098
12	G1/2	7911 12 21	24	43	26	30	75	42	16,2	0,129

7000 joining clips for in-line flow control regulators and mini ball valves



polymer H.R.



ØD		kg
4	7000 00 05	0,004
6	7000 00 05	0,004
8	7000 00 05	0,004
10	7000 00 06	0,009
12	7000 00 06	0,009